SIDEWALK DESIGN STANDARDS

OPTIONAL SIDEWALK LOCATIONS
1, 2, 3, 4

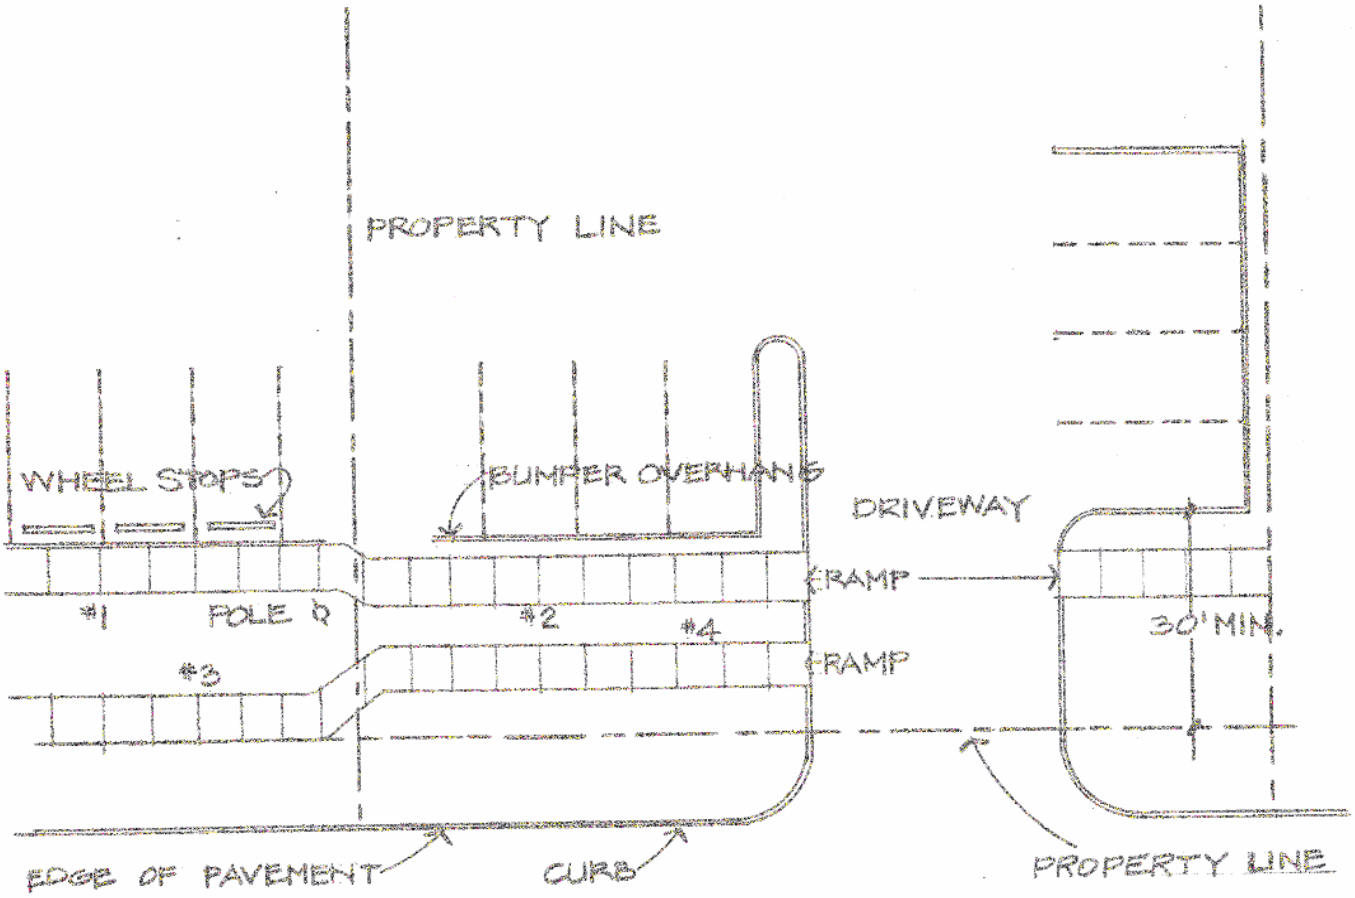

REQUIRED SIDEWALKS = 5' CONCRETE

SIDEWALK RAMPS AT DRIVEWAY AND STREET INTERSECTIONS

SIDEWALKS SHALL BE ALIGNED A THE SIDE PROPERTY LINES

SCALE: 20:1