_EGEND

WATERCOURSE STRUCTURE EDGE OF PAVEMENT SAN. OR STORM SEWER PIPE FILTER FABRIC FENCE MUD TRACKING BET TEST PIT P.H. 1 PERCOLATION TEST

GENERAL CONSTRUCTION NOTES:

158.6±

 ALL SITE CONSTRUCTION SHALL CONFORM TO THE TOWN OF WESTPORT STANDARDS SPECIFICATION. IN THE ABSENCE OF THE TOWN OF WESTPORT STANDARDS, REFER TO THE STATE OF CONNECTICUT DEPARTMENT OF RANSPORTATION FORM 814A, 1995

SPOT ELEVATION

163.0

- 2. SUBSURFACE STRUCTURES AND UTILITIES HAVE BEEN DETERMINED FROM EXISTING RECORDS AND ARE NOT GUARANTEED TO BE COMPLETE OR ACCURATE. INITIA DETERMINATION OF UTILITY LOCATIONS SHALL INCLUDE BUT IS NOT LIMITED TO CONTACTING "CALL BEFORE YOU DIG". TO AVOID CONFLICT OF THE PROPOSED WORK AND EXISTING UTILITIES, THE CONTRACTOR SHALL LOCATE EXISTING UTILITIES BY EXCAVATING TEST HOLES. SHOULD THE CONTRACTOR DETERMINE THAT A CONFLICT EXISTS. HE SHALL PROMPTLY NOTIFY THE ENGINEER WHO WILL MAKE THE NECESSARY DESIGN ADJUSTMENTS.
- ALL UTILITIES SHALL BE PLACED UNDERGROUND AND SHALL BE INSTALLED IN ACCORDANCE WITH APPLICABLE REQUIREMENTS OF THE APPROPRIATE UTILITY COMPANY
- 4. ALL PRECAST STORM-WATER GALLERIES AND YARD DRAIN BASINS SHALL SUPPORT H20 LOADING.
- THE CONTRACTOR/BUILDER SHALL BE RESPONSIBLE FOR DIRECTING THE PROPER VOLUME OF STORM WATER RUNOFF TO THE APPROPRIATE DRAINAGE DETENTION SYSTEM - SEE DRAINAGE COMPUTATIONS PREPARED BY CHAPPA SITE CONSULTING, LLC.
- SURVEY INFORMATION TAKEN FROM A MAP PREPARED FOR EYMARD CHITTY & MADHURYA CHITTY PREPARED BY WALTER H. SKIDD, L.S.; FAIRFIELD, CT. DATED: JANUARY 9, 2023.
- 7. SANITARY SEWER LATERAL SHALL BE 6" PVC SDR-35 (ASTM 3034) SEWER PIPE. SANITARY LATERAL SHALL BE INSTALLED WITH A MINIMUM COVER OF 30" AND A
- WATER SERVICE SHALL BE LOCATED A MINIMUM OF TEN FEET FROM ANY SANITARY SEWER PIPE.

SEDIMENTATION AND EROSION CONTROL NOTES:

- ALL EROSION AND SEDIMENT CONTROL MEASURES WILL BE CONSTRUCTED IN ACCORDANCE WITH THE STANDARDS AND SPECIFICATIONS OF THE "CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL."
- ALL LAND DISTURBANCE SHALL BE KEPT TO A MINIMUM; RESTABILIZATION SHALL BE SCHEDULED AS SOON AS PRACTICAL
- EROSION AND SEDIMENT CONTROL MEASURES WILL BE INSTALLED PRIOR TO CONSTRUCTION WHENEVER POSSIBLE.
- 4. ALL CONTROL MEASURES WILL BE MAINTAINED IN EFFECTIVE
- ADDITIONAL CONTROL MEASURES WILL BE INSTALLED DURING THE CONSTRUCTION PERIOD, IF NECESSARY OR REQUIRED.
- THE OWNER IS ASSIGNED THE RESPONSIBILITY FOR IMPLEMENTING THIS EROSION AND SEDIMENT CONTROL PLAN. THIS RESPONSIBILITY INCLUDES THE INSTALLATION AND MAINTENANCE OF CONTROL MEASURES, INFORMING ALL PARTIES ENGAGED ON THE CONSTRUCTION SITE OF THE REQUIREMENTS AND OBJECTIVES OF THE PLAN, NOTIFYING THE WESTPORT CONSERVATION COMMISSION OF ANY TRANSFER OF THIS RESPONSIBILITY, AND FOR CONVEYING A COPY OF THE EROSION AND SEDIMENT CONTROL PLAN IF THE TITLE TO THE LAND IS TRANSFERRED.
- ALL SEDIMENT REMOVED FROM CONTROL STRUCTURES WILL BE DISPOSED OF IN A MANNER WHICH IS CONSISTENT WITH THE
- FOR EROSION AND SILTATION CONTROL, FILTER FABRIC FENCE WILL BE INSTALLED AROUND ALL STOCKPILES OF FILL MATERIALS; OR AS DIRECTED BY THE WESTPORT CONSERVATION
- 9. ONCE STOCKPILES ARE IN PLACE THEY SHALL BE SEEDED TO
- THE CONTRACTOR SHALL KEEP ALL PUBLIC ROADWAYS CLEAN AND CLEAR OF ALL MUD DURING CONSTRUCTION AND SHALL IMPLEMENT WHATEVER MEASURES DIRECTED BY THE TOWN OF WESTPORT. SUCH MEASURES SHALL INCLUDE, BUT ARE NOT LIMITED TO, THE CONSTRUCTION OF MUD TRACKING BEDS 4" DEEP WHERE SHOWN ON PLAN OR DIRECTED BY THE TOWN OF

*EXISTING BUILDING COVERAGE: RESIDENCE, PORCH & DECK 1,667.6 SQ. FT. FRAME GARAGE 359.3 SQ. FT. STONE BQQ 20.6 SQ. FT. TOTAL EXISTING BUILDING COVERAGE . 2,047.5 SQ. FT./5,400 SQ. FT. = 37.92 %

SOIL TEST RESULTS FROM

11 - 28" RED/BROWN SANDY LOAM

28 - 64" GREY/BROWN MED. COARSE

* NO MOTTLES

09 - 29" RED/BROWN SANDY LOAM

TRACE OF SILT

* NO MOTTLES

* NO LEDGE

PERCOLATION TEST RESULTS

Date: JANUARY 15, 2020

PERC HOLE "A"

10:18 14.00"

10:38 22.00"

10:48 24.50"

10:58 26.75"

18.50"

28.75"

30.25"

MAXIMUM ALLOWABLE EXCAVATION OR FILL AMOUNT

Depth = 34"

10:28

11:08

11:18

PROPOSED EXCAVATION OR FILL AMOUNT = 75 C.Y.

SAND AND GRAVEL

* NO GROUND WATER

TIME READING DROP IN INCHES PERCOLATION RATE

4.50

3.50

2.50

2.25

2.00

1.50

1" in 6.7 minutes

29 - 84" GREY/BROWN COARSE

SAND; LITTLE GRAVEL

* NO GROUND WATER

* LARGE ROCK AT 48"

8 MURVON COURT

JANUARY 14, 2020

00 - 11" TOPSOIL

Test Pits

Test Pit #1

Test Pit #2

00 - 09" TOPSOIL

*EXISTING LOT COVERAGE: TOTAL EXISTING BUILDING COVERAGE 2,047.5 SQ. FT. FISH PONDS 172 SQ. FT. ASPHALT DRIVEWAY 548 SQ. FT. TOTAL EXISTING LOT COVERAGE 2,767.5 SQ. FT./5,400 SQ. FT. = 51.25 %

*EXISTING BUILDING & LOT COVERAGE INFORMATION PREPARED BY WALTER H. SKIDD, L.S.

PROPOSED COVERAGE CALCULATION (AS DESCRIBED IN THE WESTPORT PLANNING & ZONING REGULATIONS) 11 MURVON COURT ROAD; WESTPORT, CT

THE 5,400 s.f. SITE IS LOCATED WITHIN THE RESIDENCE 'A' ZONE Ag (TOTAL SITE AREA)= EASEMENT= At (Ag - EASEMENT) = 5,400 s.f. W (WETLAND) = 000 s.f. S (SLOPES > 25%) =000 s.f. An (At - (W + S)) =5,400 s.f. Abc (An + 0.2(W+S)) =5,400 s.f.

THE BASE LOT AREA TO BE USED FOR COMPUTATION OF THE MAXIMUM ALLOWABLE BUILDING & LOT COVERAGE = 5,400 S.F.

MAXIMUM ALLOWABLE BUILDING COVERAGE = 5,400 s.f. x 15% = 810 s.f. MAXIMUM ALLOWABLE BUILDING COVERAGE = 810 S.F.

PROPOSED BUILDING COVERAGE (DWELLING & BBQ) = 1,875 S.F. PROPOSED BUILDING COVERAGE - 1,875 S.F. > ALLOWABLE COVERAGE - 810 S.F.

MAXIMUM ALLOWABLE LOT COVERAGE = 5,400 s.f. x 25% = 1,350 s.f. MAXIMUM ALLOWABLE LOT COVERAGE = 1.350 S.F.


PROPOSED BUILDING COVERAGE - 1,875 S.F. = 34.72%

PROPOSED LOT COVERAGE (DWELLING, BBQ & DRIVE) = 2,344 S.F. PROPOSED LOT COVERAGE - 2,344 S.F. > ALLOWABLE COVERAGE - 1,350 S.F.

PROPOSED LOT COVERAGE - 2,344 S.F. = 43.40%


THE PROPOSED COVERAGE CALCULATIONS ARE BASED ON PRELIMINARY HOUSE DESIGN AND FOOTPRINT AS PROVIDED BY THE OWNER. IT SHALL BE THE RESPONSIBILITY OF THE OWNER OR THEIR BUILDER TO RECOMPUTE THE COVERAGE CALCULATIONS USING THE FINAL BUILDING PLANS IN ORDER TO INSURE THAT THE ACTUAL BUILDING/LOT COVERAGE DOES NOT EXCEED THE COVERAGE AREAS DELINEATED ON THE ZONING PERMIT.

| AVERAGE (| GRADE | CALCULATIONS |
|----------------|--------------|--------------|
| AVERAGE EXIST | ING GRADE | ELEV. = 8.9± |
| AVERAGE PROP | OSED GRADE | ELEV. = 9.2± |
| GRADE | EXISTING | PROPOSED |
| POINT# | GRADE | GRADE |
| GP#1 | 9.1± | 10.1± |
| GP#2 | 9.3± | 9.9± |
| GP#3 | $9.3\pm$ | 8.8± |
| | 8.7± | 9.3± |
| GP#5 | 8.7± | 8.8± |
| - 11 | 8.8± | 8.8± |
| GP#7 | 8.7± | 8.8± |
| GP#8 | 8.5± | 8.8± |
| GP#9 | 8.7± | 9.2± |
| 14 | 9.0± | 9.2± |
| GP#11 | 9.2± | 9.2± |
| GP#12 GP#13 | 9.1± 9.1± | 9.3± 9.3± |
| GF#13 | 9.11 | 9.31 |
| | = 116.2± | 119.5± |
| # OF SPOTS = | = 13 | 13 |

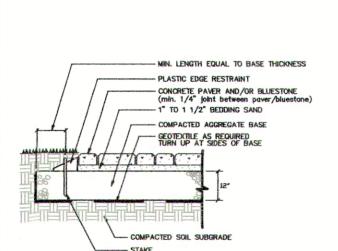


AVERAGE GRADE = 8.9±

TYPICAL PERVIOUS PAVER/BLUESTONE DETAIL

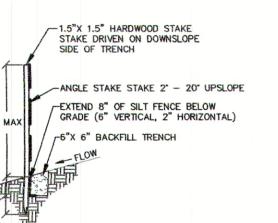


TYPICAL SILT FENCE

EXISTING UTILITY LOCATIONS ARE NOT GUARANTEED, CONTRACTOR SHALL NOTIFY CALL BEFORE YOU DIG PRIOR TO ANY EXCAVATION.

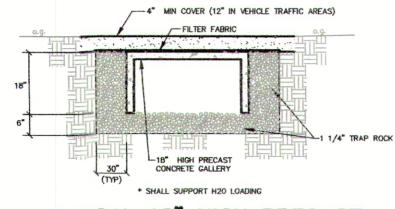

TYPICAL 18" HIGH PRECAST CONCRETE STORM WATER GALLERY

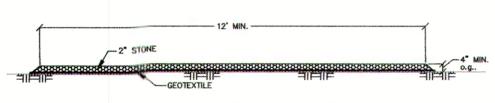

TYPICAL MUD TRACKING BED

