


SIDEWALK DESIGN STANDARDS
 OPTIONAL SIDEWALK LOCATIONS
 # 1, 2, 3, 4

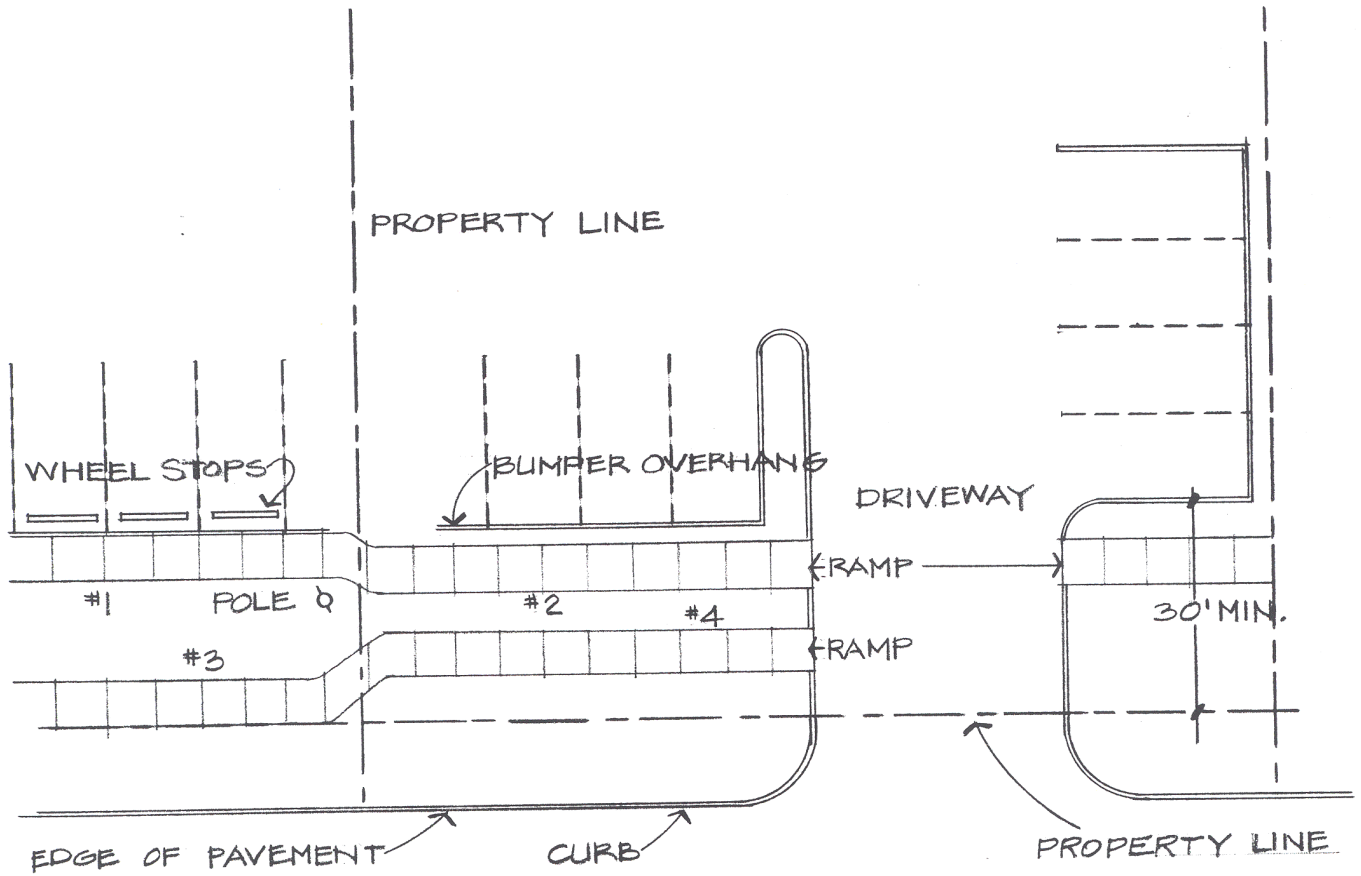

REQUIRED SIDEWALKS = 5' CONCRETE
 SIDEWALK RAMPS AT DRIVEWAY AND STREET INTERSECTIONS
 SIDEWALKS SHALL BE ALIGNED AT THE SIDE PROPERTY LINES

SCALE: 20:1